Spec Sheet

Genuine Comfort Energy Management Occupancy Sensor Wireless Wall Thermostat

1 Stage Heat, 1 Stage Cool Conventional | 2 Stage Heat, 1 Stage Cool Heat Pump | Non-Programmable

FEATURES

Model: GC-THOS-O-1

- Wireless Thermostat
- 3 Phase Setback
- Customizable Setbacks (Time/Temp.)
- Energy Management Occupancy Sensor
- Easy Read Display
- Blue Back-Light
- Easy Access Battery Compartment
- Separate B & O Terminals
- Separate Heating and Cooling Swing (Cycle Rate) Adjustments
- Room Temperature Calibration Adjustments
- 3 Minute Compressor Delay Protection (Selectable On or Off)
- Easy Wire Colour Coded Terminal Blocks
- Battery or 24V Power
- 1 Year Limited Warranty

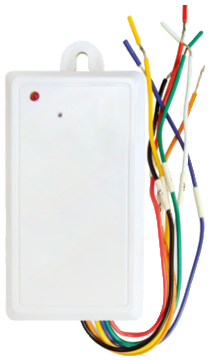

MODEL IDENTIFICATION

Example: GC-THOS-O-1

GC	-	TH	-	OS	-	O	-	1
Brand Genuine Comfort		Thermostat		Occupancy Wireless		Internal Use		Version

SPECIFICATIONS

Model ID	GC-THOD-O-1
Display Range of Temperature	32°F to 99°F (0°C to 40°C)
Control Range of Temperature	44°F to 90°F (7°C to 32°C)
Load Rating	1 amp per terminal, 1.5 amp max all terminals combined
Display Accuracy	+/-1°F
Swing (Cycle Rate or Differential)	Heating and Cooling are adjustable from 0.2°F to 2°F
Power Source	18 to 30 VAC, NEC Class II, 50/60Hz for hardwire (common wire)
Operating Ambient	32°F to 105°F (0°C to 41°C)
Operating Humidity	90% non-condensing maximum
Dimensions of Thermostat	4.72"W x 3.86"H x 1.1"D
Setback Value Ranges	Hours: 0.5 - 24, Temperature: 0 - 20 °C
Frequency	915MHz

Manufacturer reserves the right to change specifications. Our products are subject to continuous improvements. Genuine Comfort reserves the right to modify product design and specifications, discontinue design without notice and without incurring any obligations.