

Spec Sheet

Genuine Comfort Portable Air Conditioner

FEATURES


- Digital controls
- Hand Held Remote Control (Included)
- Dehumidify Mode
- Slide-Out Washable & Easy-Clean Filter
- Adjustable Air Louvres
- 3 Fan Speeds (12k and 14k model)
- 2 Fan Speeds (10k model)
- Energy Saver Mode
- Single Pipe Setup
- Self-Evaporating System
- R32 Refrigerant
- Window Exhaust Kit Included
- Genuine Care Warranty: 1-Year Unit Replacement



MODEL IDENTIFICATION




Example: GCPAC-10CPA

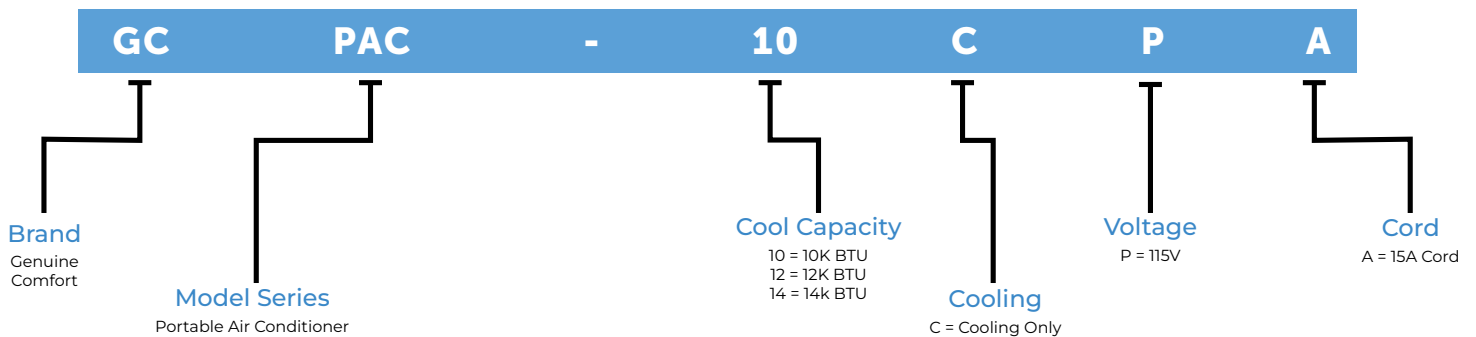

PLUG TYPE

PARALLEL



LCDI (NEMA 5-15P)
115V 15A

SPECIFICATIONS (COOLING ONLY)

Model ID			GCPAC-10CPA	GCPAC-12CPA	GCPAC-14CPA
Power Supply	Voltage (1 Ph., 60Hz)	V	115	115	115
	Capacity	BTU/H	10,000	12,000	13,500
Cooling	Input	W	1045	1330	1365
		EER	9.55	9.0	9.89
Max Input Consumption		W	1250	1260	1530
Max Current		A	11.5	11.5	11.9
Indoor Air Flow (L/M/H)		CFM	147 / N/A / 177	202 / 217 / 246	261 / 291 / 317
Indoor Sound Level (L/M/H)		dB(a)	51 / N/A / 58.7	52 / 53 / 54	53 / 54 / 57
Unit Dimensions (W x D x H)		inch	14 x 13.58 x 27.68	17.87 x 14.37 x 27.56	18.39 x 15.63 x 30.12
Package Dimension (W x D x H)		inch	15.75 x 15 x 34.25	19.29 x 16 x 34.25	20.16 x 17.4 x 34.65
Net/Gross Weight		lbs.	53 / 62	62 / 73	77 / 88
Refrigerant Type			R32	R32	R32
Operation Temperature (Indoor)		C	17 - 35	17 - 35	17 - 35
		F	63 - 95	63 - 95	63 - 95
Ambient Temperature (Outdoor)		C	18 / 43	/	/
		F	64 - 109	/	/
Cord Type			LCDI(5-15P)	LCDI(5-15P)	LCDI(5-15P)
Cord Length		Ft.	6.23	6.23	6.23
Flexible air exhaust hose length		Ft.	4.92	4.92	4.92

Manufacturer reserves the right to change specifications. Our products are subject to continuous improvements. Genuine Comfort reserves the right to modify product design and specifications, discontinue design without notice and without incurring any obligations. Warranty limited to Canada and USA. See warranty documentation for full details.